



CSC Club Laser (Magnolia Hull) Rigging Guide

Note, the Magnolia club Laser is rigged for a **Standard sail**. The Blue club Laser should be used if you want to sail a **Radial Rig**.

1. Connect the top and bottom mast sections together.
2. Feed the sail luff tube onto the mast.
3. Arrange the Grey outhaul line so that it's over the mast step as per Pic 1 below.
4. Insert mast into the mast step, as per Pic 2.

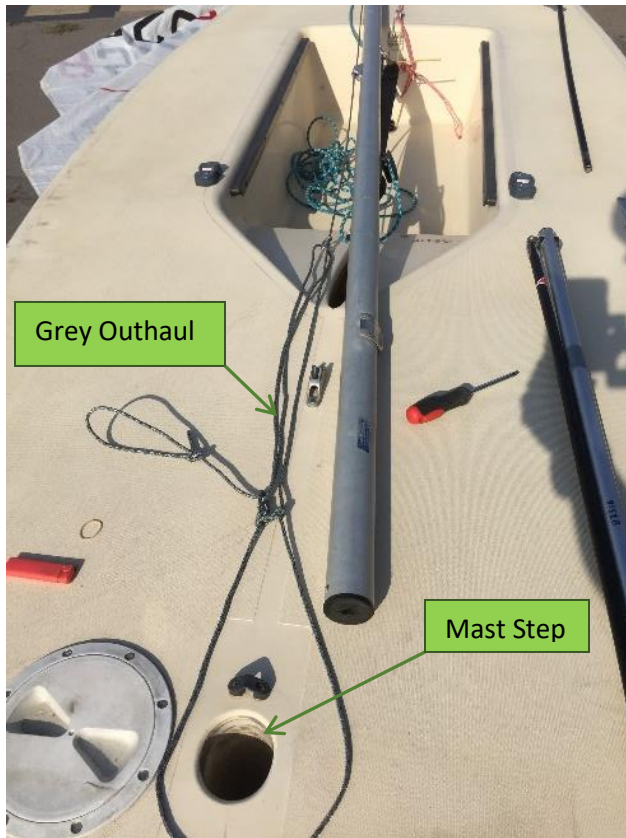

Pic 1

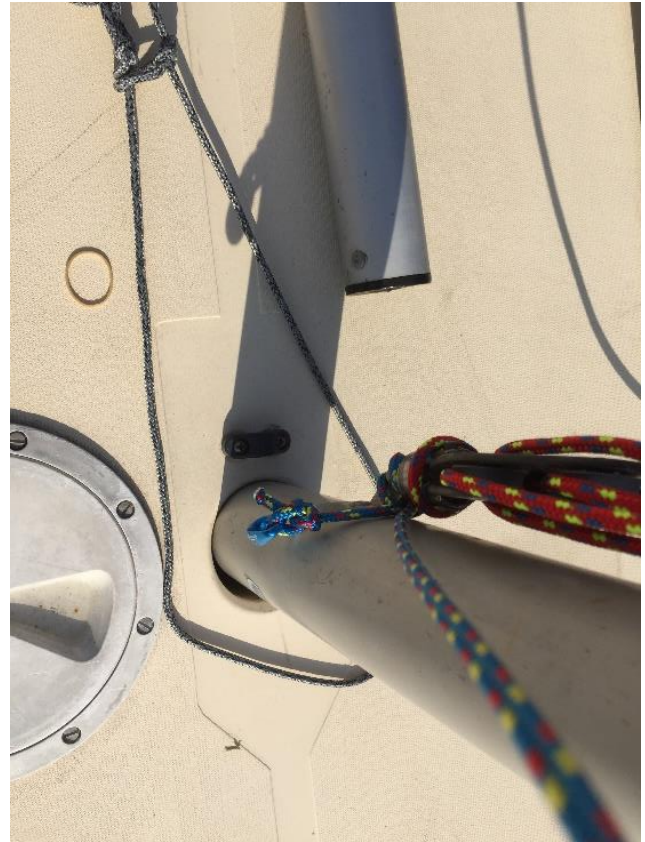


Pic 2

5. Slide the outhaul loop up the mast and fit the boom on to the gooseneck (Pic 3).



Pic 3

6. Attach the clew hook to the sail, together with the clew tie down (Pic 4).

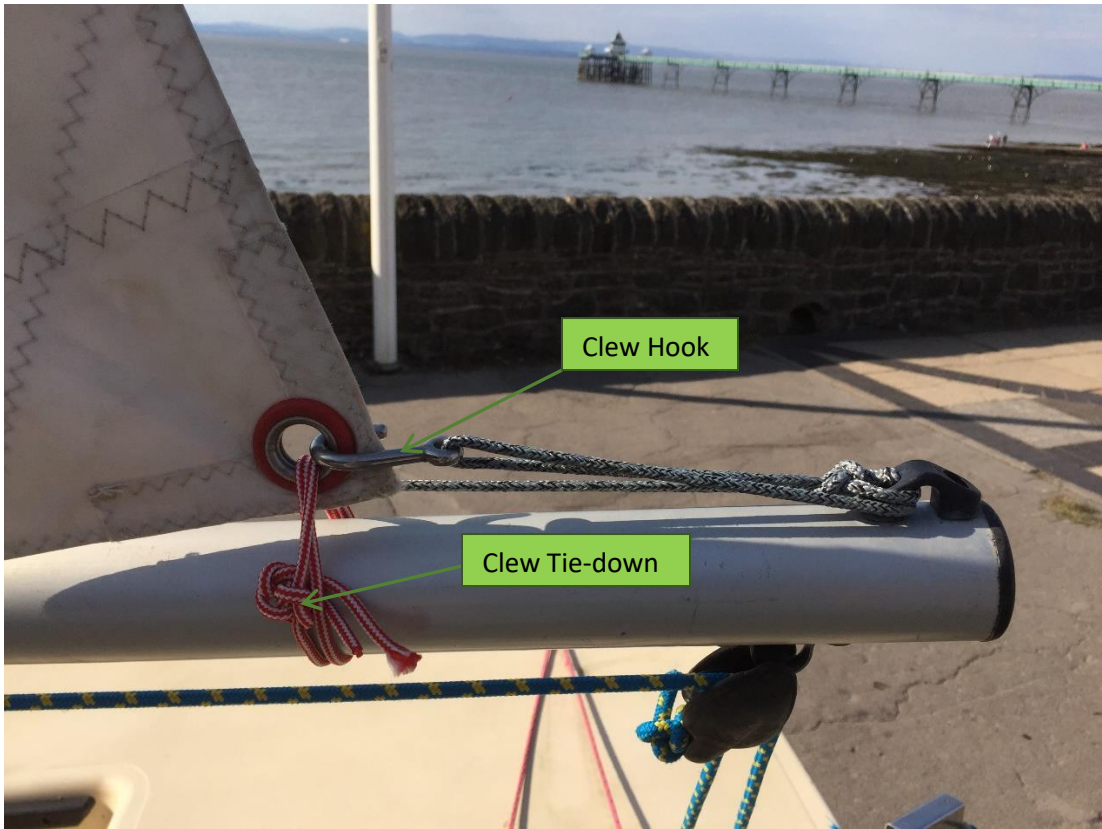

Pic 4

7. Pass the blue line through the Cunningham grommet (Pic 5).



Pic 5

8. Now pass the line through the bottom blue ferrule (Pic 6), and back up through the top blue ferrule (Pic 7).



Pic 6



Pic 7

9. Now pass the line through the Cunningham deck eye and cleat (Pic 8), daisy chain, and tie a rope handle.



Pic 8

10. Attach the kicker (Pic 9).



Pic 9

11. The Cunningham, Kicker, and Outhaul should now look like this (Pic 10).



Pic 10

12. Fit the rudder and tiller noting that they are have been pre-assembled, and should remain as one assembly on removal. Note this picture isn't of the actual Magnolia club laser!

